

## 5VP Series DC LOADS

### Key features:

- Models from 5kW to 60kW
- Voltage Ranges, 60V, 600V or 1000Vdc
- Current Ranges up to 1000 Adc
- High-Speed 5 Digit Precision Metering Capability
- Parallel Operation for High Power Applications
- Operating Modes: CC, CP, CR, CV, CC+CV & CP+CV
- Static and Dynamic CC Modes
- Fast Current Slew Rates
- Built-in Short Circuit Test
- Built-in Power Supply Over Current Protection Test Mode
- Built-in Power Supply Over Power Protection Test Mode
- Go/NoGo Test Support
- Auto-Sequencing
- Movable Cabinets
- Available Interface Options are USB, RS232, GPIB and LAN



### OVERVIEW

The ADAPTIVE POWER 5VP Series Programmable DC Electronic Loads are ideally suited for testing high current power supplies and batteries. With their ability to draw full current starting as low as 3.0 Vdc and as high as 1000Vdc, the 5VP Series loads can provide a wide dynamic range of load conditions.

Target applications for these loads are product design & development, production test, incoming inspection, quality control and service.

The compact design and efficient air cooling of the 5VP Series cabinets represents industry-leading power density. The 5VP Series consists of a total of twenty four different model configurations, providing a wide variation of possible current and power ranges. Starting at 5 kW and ranging to 60 kW per cabinet, all models offer dual voltage and current range capability for optimal accuracy and resolution. For applications requiring more than 60kW, two or more 5VP loads can be operated in parallel.

### CABINET SYSTEMS

The 5VP Series cabinets are fully integrated programmable DC load systems with easy mobility using ball-bearing locking casters. All user controls are along the top edge of the front panel for convenient access and viewing. Lower power level models will fit under work benches. Rear panel mounted DC bus bars handle DC current up to 1000 Adc depending on model.

The 5VP Series offers high power load performance and durability at an affordable price point.




# 5VP SERIES HIGH POWER DC LOADS

## OPERATING MODES

All 5VP Series loads support several modes of operation to accommodate a wide range of test requirements. Voltage sources like AC/DC power supplies are best tested using Constant Current (CC) mode. Battery chargers on the other hand can be tested using an E-load in Constant Voltage (CV) mode. **CC+CV** mode and **CP+CV** mode are also supported.

The 5VP Series also supports a maximum power point tracking mode (MPPT Mode) for solar panel development and test applications.

The available operating modes are Constant Current, Constant Voltage, Constant Power and Constant Resistance. A graphical representation of these modes of operation is shown below.

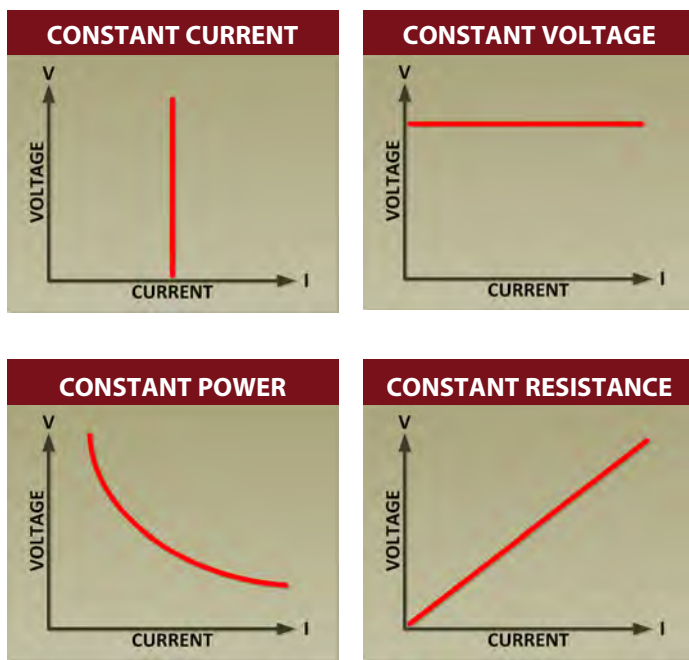

## FLEXIBLE INPUT CAPABILITIES

5VP Series loads are designed to accommodate a wide range of current input values within their maximum voltage and power capability. This allows the same loads to be used for higher voltage and low current requirements as well as low voltage higher current applications. A typical V-I operating curve is shown on the right for load model 5VP60-24. Bounded by the maximum voltage of 600Vdc and maximum current of 240A, the input range follows a 60kW power curve as shown.

Each load continuously tracks its input voltage current and power and safeguards against any operation outside of its operating limits.


This flexible operating range allows the same load to be used for a wide range of EUTs and provides great flexibility.

*For V-I Curves by specific 5VP Series model, see page 9.*

## STATIC & DYNAMIC MODES


The demands put on power supplies to support increasingly complex electronics systems continue to escalate. It is no longer sufficient to test power supplies for static load conditions. Instead, dynamic load conditions requiring rapid changes in current demanded from the power supply need to be evaluated and tested. The 5VP Series Loads serve this purpose by offering high speed programmable dynamic load control.

The diagram below illustrates the variable load current slew rates and dwell times that can be programmed on the 5VP Series loads.

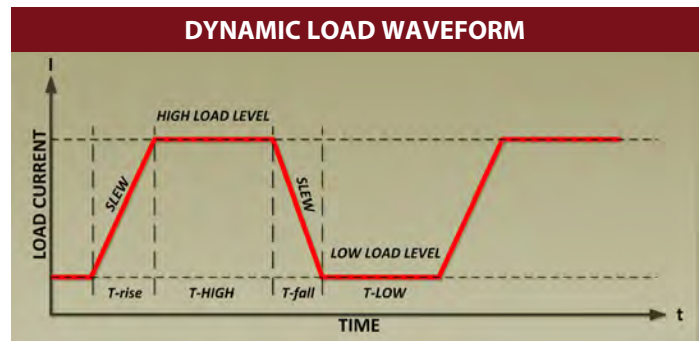

Sequences of variable slew rates and test levels can be stored in non-volatile memory for recall during dynamic transient load test execution. This makes it possible to simulate real-world demanding load conditions on power supplies driving modern electronics. With current slew rates ranging up to several Amps per microsecond and dwell times down to 50 microseconds, thorough transient stability testing of power supply designs is possible. Advanced remote sense and control feedback loops ensure stable and repeatable testing with little or no distortion during load transitions.


5VP60-24

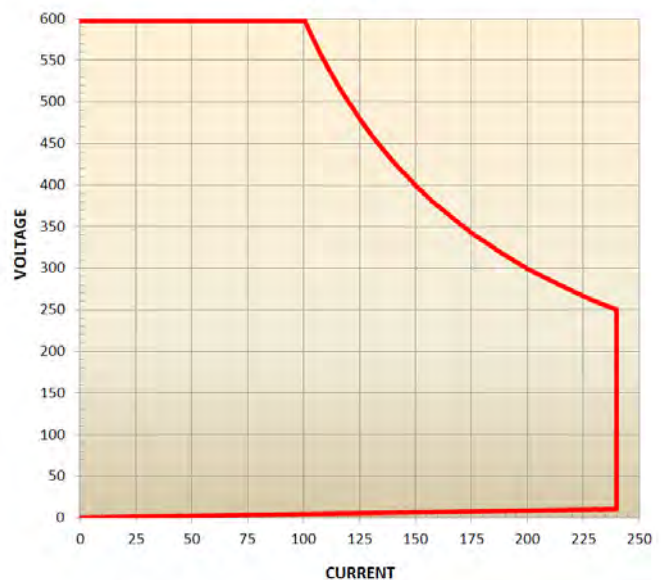

# 5VP SERIES HIGH POWER DC LOADS


## SHORT CIRCUIT TESTING

Power supplies and batteries must be able to handle short circuit conditions without failing. The 5VP Series loads have a built-in short circuit test mode that allows easy PASS/FAIL detection as part of a test protocol. Programmable parameters short duration time (T-short) and Hi and Lo voltage limits for the EUT during short conditions. If the sensed voltage falls within the user-defined limits, a PASS is recorded.

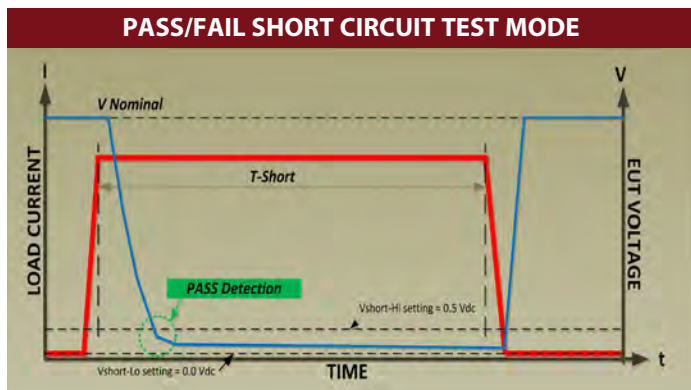


## GO/NOGO LIMIT TESTING

The GO/NGO mode of operation is a convenient way to automatically check any measured parameter like voltage, current or power against predefined upper and lower limits. Once set, the load continuously compares readings against these limits and issues a GO or NoGo error output.

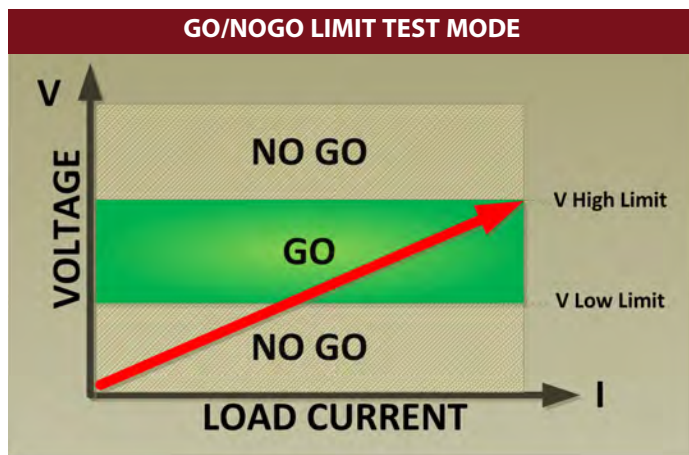


## OCP MODE TESTING

Testing the Over Current Protection (OCP) function of a power supply is easy when using the APS DC load. A special OPC mode allows setting of start current, end current and step size versus time. A preset voltage threshold level is used to detect protection trip current and terminate the test with either a PASS or FAIL result.

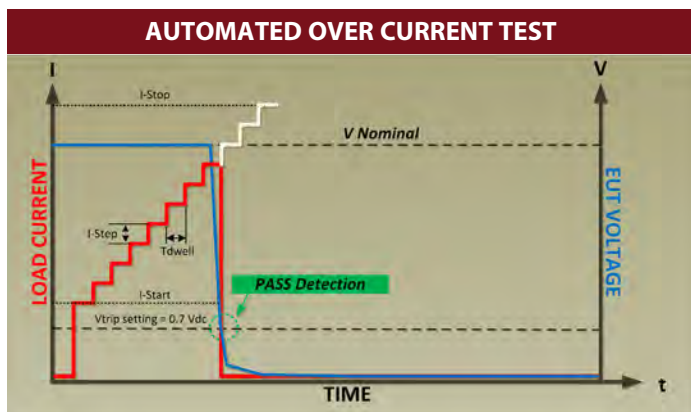

## OPP MODE TESTING

In addition to the OCP Test function, an Over Power Protection (OPP) test is provided as well. Conceptually, the test method is similar to the OCP test but instead of stepping the current, the power drawn by the load is stepped instead until the power supplies goes into protective shutdown or fold-back.

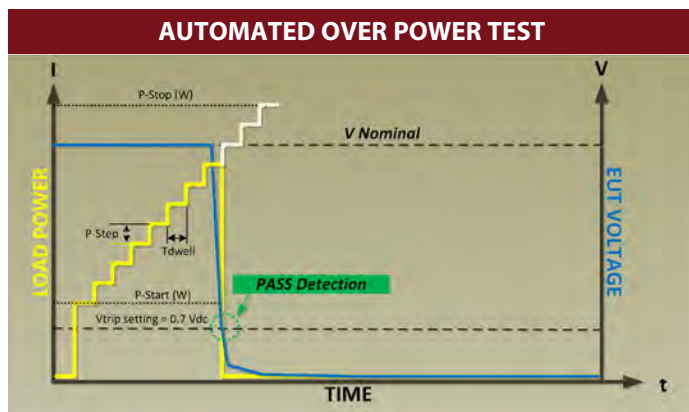

Various Sizes of 5VP Series Models shown

# 5VP SERIES HIGH POWER DC LOADS

## FRONT PANEL OPERATION

The 5VP Series Load has an easy to use front panel layout consisting of large white LED back-lit LCD readouts and a keypad, shuttle combination for settings and parameter entry. Status indicator LED's accompany the various function and mode setting keys so the operational state of the DC load is easily observed by the operator. The digital rotary encoder makes slewing of parameters very intuitive.



- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. Model Number and ranges</li> <li>2. Go/NoGo indicator and REMOTE state indicator.</li> <li>3. Operating Mode Indicators</li> <li>4. Multi-purpose 5 digit display - Voltage</li> <li>5. Multi-purpose 5 digit display - Current</li> <li>6. Multi-purpose 5 digit display - Power</li> <li>7. Power On/Off Switch</li> </ol> | <ol style="list-style-type: none"> <li>8. MODE selection key</li> <li>9. LOAD ON/OFF button and indicator</li> <li>10. Shuttle Knob, parameter selection and slewing</li> <li>11. DYNAMIC mode button and indicator</li> <li>12. High or Low Range Selection and indicator</li> <li>13. Numeric keypad and cursor keys</li> <li>14. Start/Stop, SHORT, OCP and OPP Test keys and indicators</li> <li>15. System Key Area</li> </ol> |
|--|---|


## REAR PANEL

All AC input and DC Load connections are made at the rear panel of the 5VP Series chassis. This leaves the front panel clear from any cable clutter and potential trip hazards.

Air intake is from the front and exhaust is at the rear. Some clearance behind the 5VP chassis rear panel is recommended to ensure adequate air circulation through the load.

The rear panel dimensions shown to the right are for a 5VP 10kW Chassis. Refer to specification tables on next pages for dimensions of other models.

**Note:** Remote Control Interfaces and Emergency Stop connectors are options. See Ordering Information on back page of datasheet for details.

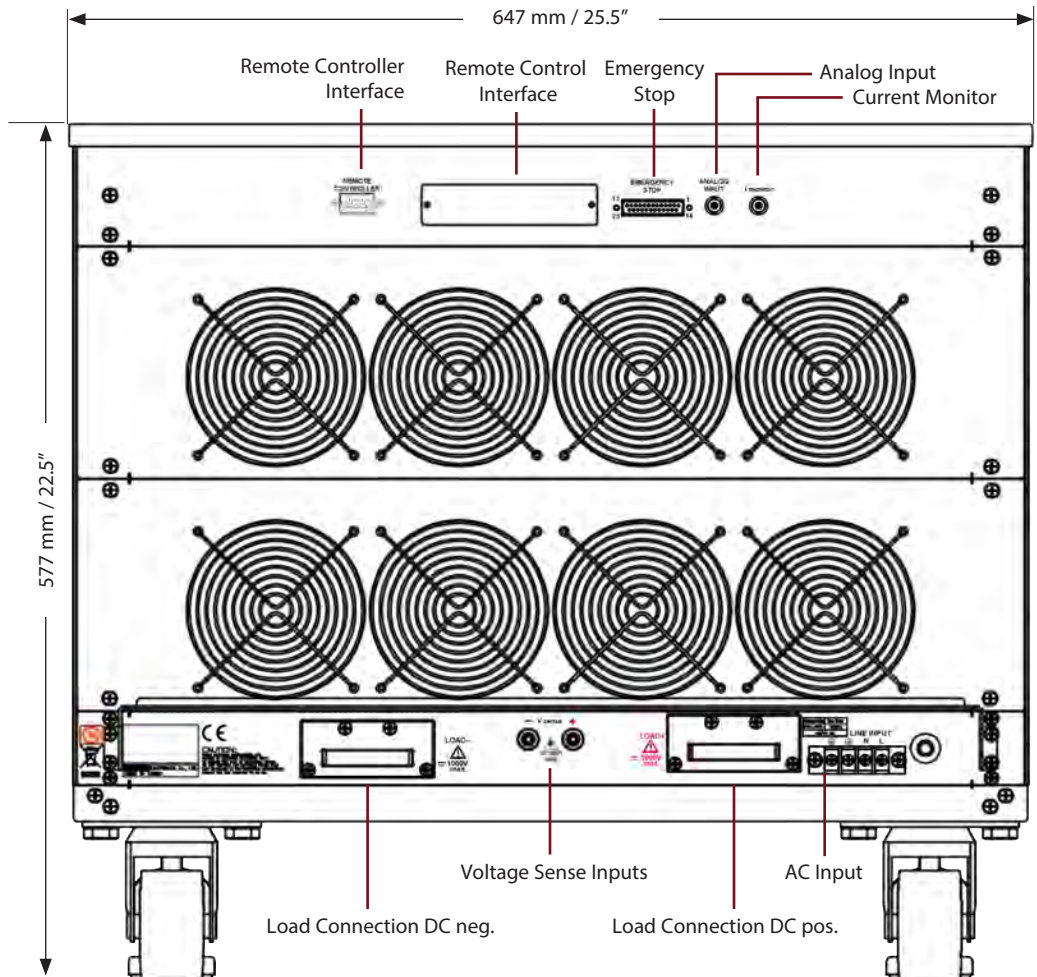

# 5VP SERIES HIGH POWER DC LOADS

## SPECIFICATIONS - 5VP Series DC LOADS - 60V Range

| MODEL                                       | 5VP05-100   | 5VP10-100                                     | 5VP15-100                         | 5VP20-100                          | 5VP25-100                           | 5VP30-100                           |
|---|---|---|-----------------------------------|------------------------------------|-------------------------------------|-------------------------------------|
| <b>OPERATING RANGES</b>                     |   |   |                                   |                                    |                                     |                                     |
| Power Ranges                                | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW                              | 0-1.5kW / 0-15kW                  | 0-2.0kW / 0-20kW                   | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    |
| Current Ranges                              | 0-100A / 0-1000A  | 0-100A / 0-1000A                              | 0-100A / 0-1000A                  | 0-100A / 0-1000A                   | 0-100A / 0-1000A                    | 0-100A / 0-1000A                    |
| Voltage Range                               | 0-60.0 V  |   |                                   |                                    |                                     |                                     |
| Minimum Voltage                             | 0.1V @ 100A / 0.7V @ 1000A  |   |                                   |                                    |                                     |                                     |
| <b>OPERATING MODES</b>                      |   |   |                                   |                                    |                                     |                                     |
| CC Mode Range                               | 0-100A / 0-1000A  | 0-100A / 0-1000A                              | 0-100A / 0-1000A                  | 0-100A / 0-1000A                   | 0-100A / 0-1000A                    | 0-100A / 0-1000A                    |
| Resolution                                  | 1.667mA / 16.67mA   | 1.667mA / 16.67mA                             | 1.667mA / 16.67mA                 | 1.667mA / 16.67mA                  | 1.667mA / 16.67mA                   | 1.667mA / 16.67mA                   |
| Accuracy                                    | ± (0.1% OF SETTING + 0.2% RANGE)  |   |                                   |                                    |                                     |                                     |
| CR Mode Range                               | 0.001 - 0.06Ω / 0.06 - 3600Ω  |   |                                   |                                    |                                     |                                     |
| Resolution                                  | 0.001mΩ / 277μΩ   |   |                                   |                                    |                                     |                                     |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)   |   |                                   |                                    |                                     |                                     |
| CV Mode Range                               | 0-60.0 V  |   |                                   |                                    |                                     |                                     |
| Resolution                                  | 1.0 mV  |   |                                   |                                    |                                     |                                     |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)  |   |                                   |                                    |                                     |                                     |
| CP Mode Range                               | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW                              | 0-1.5kW / 0-15kW                  | 0-2.0kW / 0-20kW                   | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    |
| Resolution                                  | 8.34mW / 83.4mW   | 16.7mW / 167mW                                | 25mW / 250mW                      | 33.4mW / 334mW                     | 41.7mW / 417mW                      | 50mW / 500mW                        |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)   |   |                                   |                                    |                                     |                                     |
| CC+CV / CP+CV Modes                         | See CC, CV and CP mode specifications   |   |                                   |                                    |                                     |                                     |
| <b>PROTECTION</b>                           |   |   |                                   |                                    |                                     |                                     |
| Over Power (OP)                             | 5250 W  | 10500 W                                       | 15750 W                           | 21000 W                            | 26250 W                             | 31500 W                             |
| Over Current (OC)                           | 1010 A  | 1050 A  | 1050 A                            | 1050 A                             | 1050 A                              | 1050 A                              |
| Over Voltage (OV)                           | 63.0 V  |   |                                   |                                    |                                     |                                     |
| Over Temperature (OT)                       | +85° C / +185° F  |   |                                   |                                    |                                     |                                     |
| <b>DYNAMIC OPERATION</b>                    |   |   |                                   |                                    |                                     |                                     |
| T high & T low                              | 0.150-9.999/.../9999ms  | 0.050-9.999 / 99.99 / 999.9 / 9999ms (20 kHz) |                                   |                                    |                                     |                                     |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms  |   |                                   |                                    |                                     |                                     |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm  |   |                                   |                                    |                                     |                                     |
| Slew Rate                                   | 24mA-1.5A/μs  | 66.4mA-4.15A/μs                               |                                   |                                    |                                     |                                     |
|   | 240mA-15A/μs  | 664mA-41.5A/μs                                |                                   |                                    |                                     |                                     |
| Min. Rise Time                              | 66.7μs Typical  | 24μs Typical                                  |                                   |                                    |                                     |                                     |
| <b>METERING</b>                             |   |   |                                   |                                    |                                     |                                     |
| Voltage Range                               | 0 - 6.0 V / 0 - 60.0 V  |   |                                   |                                    |                                     |                                     |
| Resolution                                  | 0.1 mV / 1.0 mV   |   |                                   |                                    |                                     |                                     |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)   |   |                                   |                                    |                                     |                                     |
| Current Range                               | 0-100A / 0-1000 A   |   |                                   |                                    |                                     |                                     |
| Resolution                                  | 1.667mA / 16.67mA   |   |                                   |                                    |                                     |                                     |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)   |   |                                   |                                    |                                     |                                     |
| Power Range                                 | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW                              | 0-1.5kW / 0-15kW                  | 0-2.0kW / 0-20kW                   | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    |
| Resolution                                  | 0.01 W / 0.1W   | 0.01 W / 0.1W                                 | 0.01 W / 0.1W                     | 0.01 W / 0.1W                      | 0.01 W / 0.1W                       | 0.01 W / 0.1W                       |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)   |   |                                   |                                    |                                     |                                     |
| <b>SHORT CIRCUIT</b>                        |   |   |                                   |                                    |                                     |                                     |
| Max. Short Current                          | 1000 A  |   |                                   |                                    |                                     |                                     |
| <b>ANALOG I/O</b>                           |   |   |                                   |                                    |                                     |                                     |
| Analog Monitor Out / Input                  | 0 - 10 V out F.S. / 1KΩ Zout, Non-isolated / 0 - 10V in for F.S. current @ 10V (CC Mode only) |   |                                   |                                    |                                     |                                     |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |   |                                   |                                    |                                     |                                     |
| AC Input                                    | 100-240Vac ± 10%, 50/60 Hz  |   |                                   |                                    |                                     | 208-240Vac ± 10%                    |
| Power Consumption (max.)                    | 600 W   | 1000 W  | 1450 W                            | 1900 W                             | 2350 W                              | 2800 W                              |
| Dimensions (H x W x D)                      | 577x647x766mm<br>22.7"x25.5"x30.2"  |   | 736x 647x766mm<br>29"x25.5"x30.2" | 889x 647x 766mm<br>35"x25.5"x30.2" | 1048x647x766mm<br>41.3"x25.5"x30.2" | 1201x647x766mm<br>47.3"x25.5"x30.2" |
| Weight (Net)                                | 100kg / 220.5 lbs   | 130kg / 286.6 lbs                             | 170kg / 374.8 lbs                 | 220kg / 485.0 lbs                  | 280kg / 617.3 lbs                   | 340kg / 749.6 lbs                   |
| Operating Range                             | 0 - 40° C / 32 - 104° F   |   |                                   |                                    |                                     |                                     |
| EMC & Safety                                | CE Mark   |   |                                   |                                    |                                     |                                     |

# 5VP SERIES HIGH POWER DC LOADS

## SPECIFICATIONS - 5VP Series DC LOADS - 600V Range

| MODEL                                       | 5VP05-16   | 5VP10-32                        | 5VP15-48                         | 5VP20-64                          | 5VP25-80                            | 5VP30-96                            | 5VP50-21                            | 5VP60-24                           |
|---|--|---------------------------------|----------------------------------|-----------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|
| <b>OPERATING RANGES</b>                     |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Power Ranges                                | 0-0.5kW / 0-5kW  | 0-1.0kW / 0-10kW                | 0-1.5kW / 0-15kW                 | 0-2.0kW / 0-20kW                  | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    | 0-5.0kW / 0-50kW                    | 0-6.0kW / 0-60kW                   |
| Current Ranges                              | 0-16.0A / 0-160A   | 0-32.0A / 0-320A                | 0-48.0A / 0-480A                 | 0-64.0A / 0-640A                  | 0-80.0A / 0-800A                    | 0-96.0A / 0-960A                    | 0-21.0A / 0-210A                    | 0-24.0A / 0-240A                   |
| Voltage Range                               | 0 - 600.0 V  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Minimum Voltage                             | 20V @ 160A   | 20V @ 320A                      | 20V @ 480A                       | 20V @ 640A                        | 20V @ 800A                          | 20V @ 960A                          | 20V @ 210A                          | 20V @ 240A                         |
| <b>OPERATING MODES</b>                      |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| CC Mode Range                               | 0-16.0A / 0-160A   | 0-32.0A / 0-320A                | 0-48.0A / 0-480A                 | 0-64.0A / 0-640A                  | 0-80.0A / 0-800A                    | 0-96.0A / 0-960A                    | 0-21.0A / 0-210A                    | 0-24.0A / 0-240A                   |
| Resolution                                  | 0.267mA / 2.67mA   | 0.534mA / 5.34mA                | 0.8mA / 8.0mA                    | 1.067mA / 10.67mA                 | 1.334mA / 13.34mA                   | 1.6mA / 16.0mA                      | 0.35mA / 3.5mA                      | 0.4mA / 4.0mA                      |
| Accuracy                                    | ± (0.1% OF SETTING + 0.2% RANGE)   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| CR Mode Range                               | 0.0378Ω-3.75Ω<br>3.75Ω-15000Ω  | 0.0192Ω-1.875Ω<br>1.875Ω-12500Ω | 0.0126Ω-1.25Ω<br>1.25Ω-15000Ω    | 0.0096Ω-0.9375Ω<br>0.9375Ω-11250Ω | 0.0078Ω-0.75Ω<br>0.75Ω-11250Ω       | 0.0066Ω-0.625Ω<br>0.625Ω-12500Ω     | 0.0286Ω-2.857Ω<br>2.857Ω-8571Ω      | 0.0834Ω-2.5Ω<br>2.5Ω-7500Ω         |
| Resolution                                  | 63μΩ / 4.4μΩ   | 0.032mΩ / 0.0088mΩ              | 0.021mΩ / 0.0133mΩ               | 0.016mΩ / 0.0177mΩ                | 0.013mΩ / 0.0222mΩ                  | 0.011mΩ / 0.0266mΩ                  | 47.7uΩ / 5.83uS                     | 41.7uΩ / 6.66uS                    |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| CV Mode Range                               | 0-600.0 V  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Resolution                                  | 10 mV  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| CP Mode Range                               | 0-0.5kW / 0-5kW  | 0-1.0kW / 0-10kW                | 0-1.5kW / 0-15kW                 | 0-2.0kW / 0-20kW                  | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    | 0-5.25kW / 0-50kW                   | 0-6.0kW / 0-60kW                   |
| Resolution                                  | 8.34mW / 83.4mW  | 16.7mW / 167mW                  | 25mW / 250mW                     | 33.4mW / 334mW                    | 41.7mW / 417mW                      | 50mW / 500mW                        | 87.5mW / 875mW                      | 0.1W / 1.0W                        |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| CC+CV / CP+CV Modes                         | See CC, CV and CP mode specifications  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| <b>PROTECTION</b>                           |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Over Power (OP)                             | 5250 W   | 10500 W                         | 15750 W                          | 21000 W                           | 26250 W                             | 31500 W                             | 52500 W                             | 63000 W                            |
| Over Current (OC)                           | 168 A  | 336 A                           | 504 A                            | 672 A                             | 840 A                               | 1008 A                              | 220.5 A                             | 252 A                              |
| Over Voltage (OV)                           | 630.0V   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Over Temperature (OT)                       | +85° C / +185° F   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| <b>DYNAMIC OPERATION</b>                    |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| T high & T low                              | 0.050-9.999 / 99.99 / 999.9 / 9999ms (20 kHz)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Slew Rate                                   | 12.8mA-800mA/μs<br>128mA-8A/μs   | 25.6mA-1.6A/μs<br>256mA-16A/μs  | 38.4mA-2.4A/μs<br>384mA-24A/μs   | 51.2mA-3.2A/μs<br>512mA-32A/μs    | 64mA-4A/μs<br>640mA-40A/μs          | 76.8mA-4.8A/μs<br>768mA-48A/μs      | 16.8mA-1.05A/uS<br>168mA-10.5A/uS   | 19.2mA-1.2A/uS<br>192mA-12A/uS     |
| Min. Rise Time                              | 20μs Typical   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| <b>METERING</b>                             |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Voltage Range                               | 0 - 60.0V / 0 - 600V   |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Resolution                                  | 0.1 mV / 1.0 mV  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Current Range                               | 0-16.0A / 0-160A   | 0-32.0A / 0-320A                | 0-48.0A / 0-480A                 | 0-64.0A / 0-640A                  | 0-80.0A / 0-800A                    | 0-96.0A / 0-960A                    | 0-21.0A / 0-210A                    | 0-24.0A / 0-240A                   |
| Resolution                                  | 0.267mA / 2.67mA   | 0.534mA / 5.34mA                | 0.8mA / 8.0mA                    | 1.067mA / 10.67mA                 | 1.334mA / 13.34mA                   | 1.6mA / 16.0mA                      | 0.35mA / 3.5mA                      | 0.4mA / 4mA                        |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Power Range                                 | 0-0.5kW / 0-5kW  | 0-1.0kW / 0-10kW                | 0-1.5kW / 0-15kW                 | 0-2.0kW / 0-20kW                  | 0-2.5kW / 0-25kW                    | 0-3.0kW / 0-30kW                    | 0-5.0kW / 0-50kW                    | 0-6.0kW / 0-60kW                   |
| Resolution                                  | 0.01W / 0.1W   | 0.01W / 0.1W                    | 0.01W / 0.1W                     | 0.01W / 0.1W                      | 0.01W / 0.1W                        | 0.01W / 0.1W                        | 0.01W / 0.1W                        | 0.01W / 0.1W                       |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| <b>SHORT CIRCUIT</b>                        |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Max. Short Current                          | 160 A  | 320 A                           | 480 A                            | 640 A                             | 800 A                               | 960 A                               | 210 A                               | 240 A                              |
| <b>ANALOG I/O</b>                           |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| Analog Mon. Out / Input                     | 0 - 10V out F.S. / 1KΩ Zout, Non-isolated / 0 - 10V in for F.S. current @ 10V (CC Mode only) |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| AC Input                                    | 100-240Vac ± 10%, 50/60 Hz   |                                 |                                  |                                   |                                     | 208-240Vac ± 10%, 50/60 Hz          |                                     |                                    |
| Power Consumption (max.)                    | 600 W  | 1000 W                          | 1450 W                           | 1900 W                            | 2350 W                              | 2800 W                              | 5450 W                              | 5500 W                             |
| Dimensions (H x W x D)                      | 577x647x766mm<br>22.7"x25.5"x30.2"   |                                 | 736x647x766mm<br>29"x25.5"x30.2" | 889x647x766mm<br>35"x25.5"x30.2"  | 1048x647x766mm<br>41.3"x25.5"x30.2" | 1201x647x766mm<br>47.3"x25.5"x30.2" | 1360x853x766mm<br>53.6"x33.6"x30.2" | 1513x853x66mm<br>59.6"x33.6"x30.2" |
| Weight (Net)                                | 100kg / 220.5 lbs  | 130kg / 286.6 lbs               | 170kg / 374.8 lbs                | 220kg / 485.0 lbs                 | 280kg / 617.3 lbs                   | 340kg / 749.6 lbs                   | 510kg/1124.4 lbs                    | 630kg/1388.9 lbs                   |
| Operating Range                             | 0 - 40° C / 32 - 104° F  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |
| EMC & Safety                                | CE Mark  |                                 |                                  |                                   |                                     |                                     |                                     |                                    |

# 5VP SERIES HIGH POWER DC LOADS

## SPECIFICATIONS - 5VP Series DC LOADS - 1000V Range

| MODEL                                       | 5VP05-05  | 5VP10-10                      | 5VP15-15                                  | 5VP20-20                                  | 5VP25-25                                     |
|---|---|-------------------------------|---|---|--|
| <b>OPERATING RANGES</b>                     |   |                               |   |   |  |
| Power Ranges                                | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW              | 0-1.5kW / 0-15kW                          | 0-2.0kW / 0-20kW                          | 0-2.5kW / 0-25kW                             |
| Current Ranges                              | 0 - 5.0 A / 0 - 50 A  | 0 - 10 A / 0 - 100 A          | 0 - 15 A / 0 - 150 A                      | 0 - 20 A / 0 - 200 A                      | 0 - 25 A / 0 - 250 A                         |
| Voltage Range                               | 0 - 1000V   |                               |   |   |  |
| Minimum Voltage                             | 20V @ 50A   | 20V @ 100A                    | 20V @ 150A                                | 20V @ 200A                                | 20V @ 250A                                   |
| <b>OPERATING MODES</b>                      |   |                               |   |   |  |
| CC Mode Range                               | 0 - 5.0 A / 0 - 50 A  | 0 - 10 A / 0 - 100 A          | 0 - 15 A / 0 - 150 A                      | 0 - 20 A / 0 - 200 A                      | 0 - 25 A / 0 - 250 A                         |
| Resolution                                  | 0.08mA / 0.8mA  | 0.16mA / 1.6mA                | 0.25mA / 2.5mA                            | 0.32mA / 3.2mA                            | 0.4mA / 4mA                                  |
| Accuracy                                    | ± (0.1% OF SETTING + 0.2% RANGE)  |                               |   |   |  |
| CR Mode Range                               | 0.4008Ω-20Ω / 20Ω-24000Ω  | 0.2004Ω-10Ω / 10Ω-12000Ω      | 0.1344Ω-6.666Ω / 6.666Ω-8000Ω             | 0.1008Ω-5Ω / 5Ω-6000Ω                     | 0.0804Ω-4Ω / 4Ω-4800Ω                        |
| Resolution                                  | 0.334mΩ / 0.833μΩ   | 0.167mΩ / 1.666μΩ             | 0.112mΩ / 2.5μΩ                           | 0.084mΩ / 3.33μΩ                          | 0.067mΩ / 4.166μΩ                            |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)   |                               |   |   |  |
| CV Mode Range                               | 20.0 - 1000.0 V   |                               |   |   |  |
| Resolution                                  | 16mV  |                               |   |   |  |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)  |                               |   |   |  |
| CP Mode Range                               | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW              | 0-1.5kW / 0-15kW                          | 0-2.0kW / 0-20kW                          | 0-2.5kW / 0-25kW                             |
| Resolution                                  | 8mW / 80mW  | 16mW / 160mW                  | 25mW / 250mW                              | 32mW / 320mW                              | 40mW / 400mW                                 |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)   |                               |   |   |  |
| CC+CV / CP+CV Modes                         | See CC, CV and CP mode specifications   |                               |   |   |  |
| <b>PROTECTION</b>                           |   |                               |   |   |  |
| Over Power (OP)                             | 5250 W  | 10500 W                       | 15750 W                                   | 21000 W                                   | 26250 W                                      |
| Over Current (OC)                           | 52.0 A  | 104.0 A                       | 156.0 A                                   | 208.0 A                                   | 260.0 A                                      |
| Over Voltage (OV)                           | 1040.0 V  |                               |   |   |  |
| Over Temperature (OT)                       | +85° C / +185° F  |                               |   |   |  |
| <b>DYNAMIC OPERATION</b>                    |   |                               |   |   |  |
| T high & T low                              | 0.050 - 9.999 / 99.99 / 999.9 / 9999ms (20 kHz)   |                               |   |   |  |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms  |                               |   |   |  |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm  |                               |   |   |  |
| Slew Rate                                   | 0.004A-0.25A/μs<br>0.04A-2.5A/μs  | 0.008A-0.5A/μs<br>0.08A-5A/μs | 0.012A-0.75A/μs<br>0.12A-7.5A/μs          | 0.016A-1A/μs<br>0.16A-10A/μs              | 0.02A-1.25A/μs<br>0.2A-12.5A/μs              |
| Min. Rise Time                              | 20μs Typical  |                               |   |   |  |
| <b>METERING</b>                             |   |                               |   |   |  |
| Voltage Range                               | 0 - 100.0V / 100 - 1000 V   |                               |   |   |  |
| Resolution                                  | 1.6 mV / 16 mV  |                               |   |   |  |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)   |                               |   |   |  |
| Current Range                               | 0 - 5.0 A / 0 - 50 A  | 0 - 10 A / 0 - 100 A          | 0 - 15 A / 0 - 150 A                      | 0 - 20 A / 0 - 200 A                      | 0 - 25 A / 0 - 250 A                         |
| Resolution                                  | 0.08mA / 0.8mA  | 0.16mA / 1.6mA                | 0.25mA / 2.5mA                            | 0.32mA / 3.2mA                            | 0.4mA / 4mA                                  |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)   |                               |   |   |  |
| Power Range                                 | 0-0.5kW / 0-5kW   | 0-1.0kW / 0-10kW              | 0-1.5kW / 0-15kW                          | 0-2.0kW / 0-20kW                          | 0-2.5kW / 0-25kW                             |
| Resolution                                  | 0.01 W / 0.1W   | 0.01 W / 0.1W                 | 0.01 W / 0.1W                             | 0.01 W / 0.1W                             | 0.01 W / 0.1W                                |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)   |                               |   |   |  |
| <b>SHORT CIRCUIT</b>                        |   |                               |   |   |  |
| Max. Short Current                          | 50 A  | 100 A                         | 150 A                                     | 200 A                                     | 250 A  |
| <b>ANALOG I/O</b>                           |   |                               |   |   |  |
| Analog Monitor Out / Input                  | 0 - 10 V out F.S. / 1KΩ Zout, Non-isolated / 0 - 10V in for F.S. current @ 10V (CC Mode only) |                               |   |   |  |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |                               |   |   |  |
| AC Input                                    | 100-240Vac ± 10%, 50/60 Hz  |                               |   |   |  |
| Power Consumption (max.)                    | 600 W   | 1000 W                        | 1450 W                                    | 1900 W                                    | 2350 W                                       |
| Dimensions (H x W x D)                      | 577 x 647 x 766 mm<br>29" x 25.5" x 30.2"   |                               | 736 x 647 x 766 mm<br>29" x 25.5" x 30.2" | 889 x 647 x 766 mm<br>35" x 25.5" x 30.2" | 1048 x 647 x 766 mm<br>41.3" x 25.5" x 30.2" |
| Weight (Net)                                | 100kg / 220.5 lbs   | 130kg / 286.6 lbs             | 170kg / 374.8 lbs                         | 220kg / 485.0 lbs                         | 280kg / 617.3 lbs                            |
| Operating Range                             | 0 - 40° C / 32 - 104° F   |                               |   |   |  |
| EMC & Safety                                | CE Mark   |                               |   |   |  |

# 5VP SERIES HIGH POWER DC LOADS


## SPECIFICATIONS - 5VP Series DC LOADS - 1000V Range

| MODEL                                       | 5VP30-30  | 5VP35-35                                     | 5VP40-40                                     | 5VP50-50                                     | 5VP60-60                                     |
|---|---|--|--|--|--|
| <b>OPERATING RANGES</b>                     |   |  |  |  |  |
| Power Ranges                                | 0-3.0kW / 0-30kW  | 0-3.5kW / 0-35kW                             | 0-4.0kW / 0-40kW                             | 0-5.0kW / 0-50kW                             | 0-6.0kW / 0-60kW                             |
| Current Ranges                              | 0 - 30 A / 0 - 300 A  | 0 - 35 A / 0 - 350 A                         | 0 - 40 A / 0 - 400 A                         | 0 - 52.5 A / 0 - 500 A                       | 0 - 60 A / 0 - 600 A                         |
| Voltage Range                               | 0 - 1000 V  |  |  |  |  |
| Minimum Voltage                             | 20V @ 300A  | 20V @ 350A                                   | 20V @ 400A                                   | 20V @ 500A                                   | 20V @ 600A                                   |
| <b>OPERATING MODES</b>                      |   |  |  |  |  |
| CC Mode Range                               | 0 - 30 A / 0 - 300 A  | 0 - 35 A / 0 - 350 A                         | 0 - 40 A / 0 - 400 A                         | 0 - 52.5 A / 0 - 500 A                       | 0 - 60 A / 0 - 600 A                         |
| Resolution                                  | 0.5mA / 5mA   | 0.56mA / 5.6mA                               | 0.64mA / 6.4mA                               | 0.875mA / 87.5mA                             | 1.0mA / 10mA                                 |
| Accuracy                                    | ± (0.1% OF SETTING + 0.2% RANGE)  |  |  |  |  |
| CR Mode Range                               | 0.0672Ω-3.333Ω/3.333Ω-4000Ω   | 0.0576Ω-2.857Ω/2.857Ω-3428.4Ω                | 0.0504Ω-2.5Ω/2.5Ω-3000Ω                      | 0.0384Ω-1.905Ω/1.905Ω-11430Ω                 | 0.0333Ω-1.666Ω/1.666Ω-10000Ω                 |
| Resolution                                  | 0.056mΩ / 5.0005μΩ  | 0.048mΩ / 5.84μΩ                             | 0.042mΩ / 6.66μΩ                             | 32uΩ / 8.75uS                                | 27.8uΩ / 10uS                                |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)   |  |  |  |  |
| CV Mode Range                               | 20.0 - 1000.0 V   |  |  |  |  |
| Resolution                                  | 16mV  |  |  |  |  |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)  |  |  |  |  |
| CP Mode Range                               | 0-3.0kW / 0-30kW  | 0-3.5kW / 0-35kW                             | 0-4.0kW / 0-40kW                             | 0-5.0kW / 0-50kW                             | 0-6.0kW / 0-60kW                             |
| Resolution                                  | 50mW / 500mW  | 56mW / 560mW                                 | 64mW / 640mW                                 | 87.5mW / 875mW                               | 0.1 W / 1.0 W                                |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)   |  |  |  |  |
| CC+CV / CP+CV Modes                         | See CC, CV and CP mode specifications   |  |  |  |  |
| <b>PROTECTION</b>                           |   |  |  |  |  |
| Over Power (OP)                             | 31500 W   | 36750 W                                      | 42000 W                                      | 52500 W                                      | 63000 W                                      |
| Over Current (OC)                           | 312 A   | 364 A  | 416 A  | 520 A  | 624 A  |
| Over Voltage (OV)                           | 1040.0 V  |  |  |  |  |
| Over Temperature (OT)                       | +85° C / +185° F  |  |  |  |  |
| <b>DYNAMIC OPERATION</b>                    |   |  |  |  |  |
| T high & T low                              | 0.050 - 9.999 / 99.99 / 999.9 / 9999ms (20 kHz)   |  |  |  |  |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms  |  |  |  |  |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm  |  |  |  |  |
| Slew Rate                                   | 0.024A-1.5A/μs  | 0.028A-1.75A/μs                              | 0.032A-2A/μs                                 | 42mA-2.625A/uS                               | 48mA-3A/uS                                   |
|   | 0.24A-15A/μs  | 0.28A-17.5A/μs                               | 0.32A-20A/μs                                 | 420mA-26.25A/uS                              | 480mA-30A/uS                                 |
| Min. Rise Time                              | 20μs Typical  |  |  |  |  |
| <b>METERING</b>                             |   |  |  |  |  |
| Voltage Range                               | 0 - 100.0 V / 100 - 1000 V  |  |  |  |  |
| Resolution                                  | 1.6 mV / 16 mV  |  |  |  |  |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)   |  |  |  |  |
| Current Range                               | 0 - 30 A / 0 - 300 A  | 0 - 35 A / 0 - 350 A                         | 0 - 40 A / 0 - 400 A                         | 0 - 52.5 A / 0 - 500 A                       | 0 - 60 A / 0 - 600 A                         |
| Resolution                                  | 0.5mA / 5mA   | 0.56mA / 5.6mA                               | 0.64mA / 6.4mA                               | 0.8mA / 8mA                                  | 1.0mA / 10mA                                 |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)   |  |  |  |  |
| Power Range                                 | 0-3.0kW / 0-30kW  | 0-3.5kW / 0-35kW                             | 0-4.0kW / 0-40kW                             | 0-5.0kW / 0-50kW                             | 0-6.0kW / 0-60kW                             |
| Resolution                                  | 0.01 W / 0.1W   | 0.01 W / 0.1W                                | 0.01 W / 0.1W                                | 0.01 W / 0.1W                                | 0.01 W / 0.1W                                |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)   |  |  |  |  |
| <b>SHORT CIRCUIT</b>                        |   |  |  |  |  |
| Max. Short Current                          | 300 A   | 350 A  | 400 A  | 500 A  | 600 A  |
| <b>ANALOG I/O</b>                           |   |  |  |  |  |
| Analog Monitor Out / Input                  | 0 - 10 V out F.S. / 1KΩ Zout, Non-isolated / 0 - 10V in for F.S. current @ 10V (CC Mode only) |  |  |  |  |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |  |  |  |  |
| AC Input                                    | 208-240Vac ± 10%, 50/60 Hz  |  |  |  |  |
| Power Consumption (max.)                    | 2800 W  | 3250 W                                       | 3700 W                                       | 5450 W                                       | 6200 W                                       |
| Dimensions (H x W x D)                      | 1201 x 647 x 766 mm<br>47.3" x 25.5" x 30.2"  | 1360 x 647 x 766 mm<br>53.6" x 25.5" x 30.2" | 1513 x 647 x 766 mm<br>59.6" x 25.5" x 30.2" | 1360 x 853 x 766 mm<br>53.6" x 33.6" x 30.2" | 1513 x 853 x 766 mm<br>59.6" x 33.6" x 30.2" |
| Weight (Net)                                | 340kg / 749.6 lbs   | 390kg / 859.8 lbs                            | 430kg / 948.0 lbs                            | 510kg / 1124.4 lbs                           | 630kg / 1388.9 lbs                           |
| Operating Range                             | 0 - 40° C / 32 - 104° F   |  |  |  |  |
| EMC & Safety                                | CE Mark   |  |  |  |  |




# 5VP SERIES HIGH POWER DC LOADS


## 5VP - 60V Models

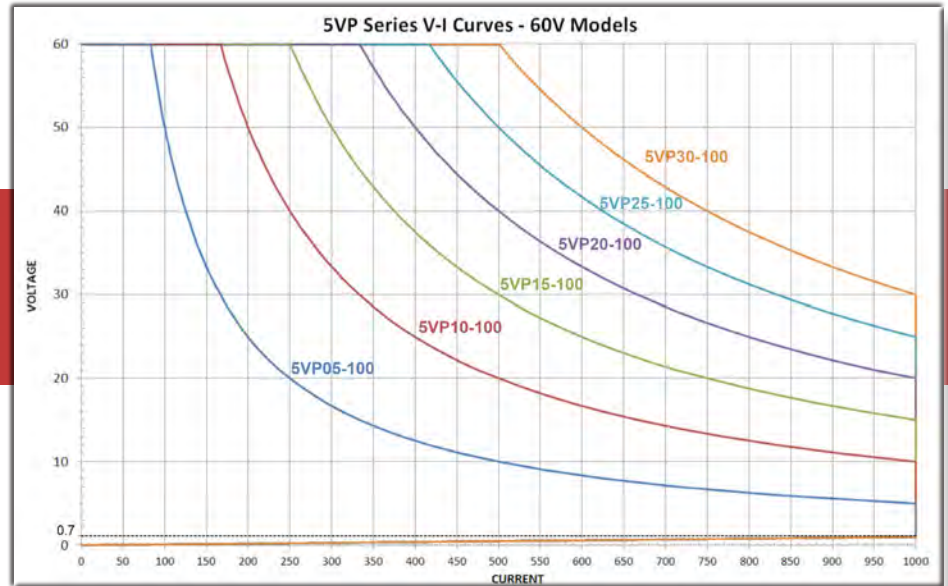

## 5VP - 600V Models

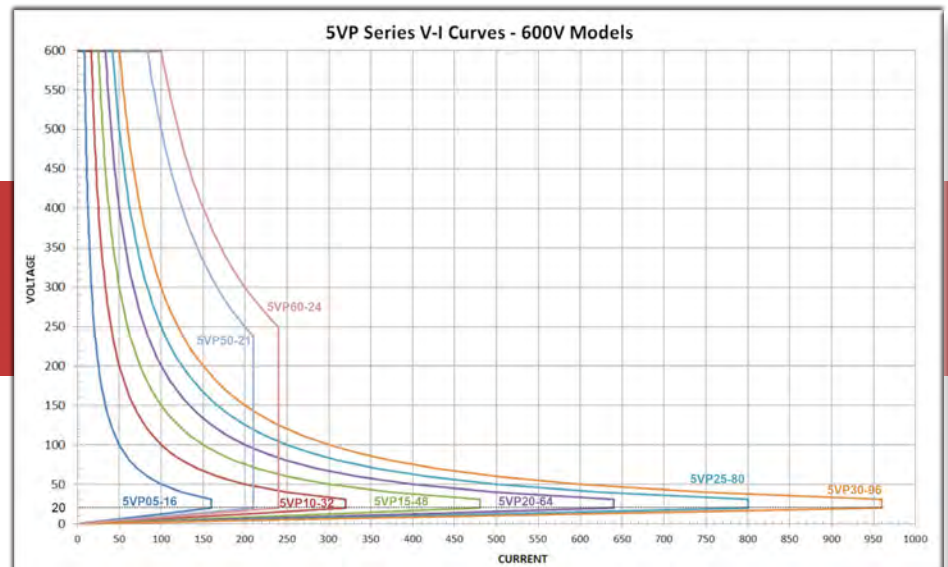

## 5VP - 1000V Models

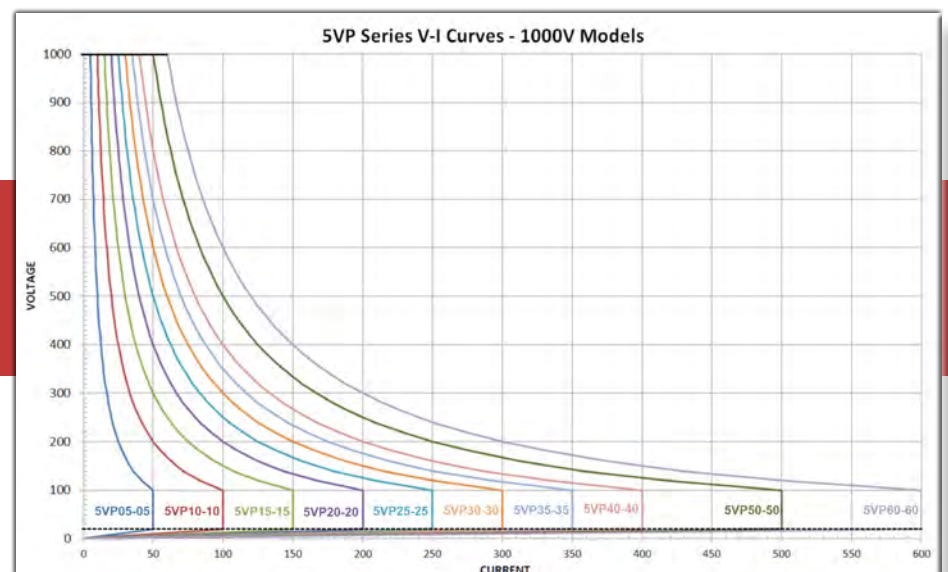

# 5VP SERIES HIGH POWER DC LOADS

## ORDERING INFORMATION:

**Line 1:** Specify DC Load Model:  
5VPxxx-xx Cabinet System

**Line 2:** Specify Remote Control Option:  
None, Opt GPIB, Opt RS232, Opt USB or Opt LAN

**Line 3:** Specify Load Cable Option. (See Table)

### Options:

-EIO External Analog & Digital Control I/O

-ES Emergency Stop

**Note:** These options cannot be retrofitted and **must** be specified at time or order.



Emergency stop Option

### Available Load Cable Options:

| Option P/N | Description                      | MOQ |
|------------|----------------------------------|-----|
| OPT-C1KA1  | Load Cable, 1000A rated, 1 meter | 2   |
| OPT-C1KA2  | Load Cable, 1000A rated, 2 meter | 2   |
| OPT-C1KA3  | Load Cable, 1000A rated, 3 meter | 2   |
| OPT-C1KA4  | Load Cable, 1000A rated, 4 meter | 2   |
| OPT-C1KA5  | Load Cable, 1000A rated, 5 meter | 2   |

### AC Input Voltage

Please specify AC Line input voltage at the ship-to location on the order as either 120Vac or 230Vac for 5VP models less than 30kW. For 30kW and higher power loads, AC input is 230Vac±10%.

### Included in Mainframe Ship kit:

- User Manuals in PDF Format on CD ROM.
- Analog Input BNC Cable (1 meter/39.4").
- Voltage Sense alligator clip lead, Red (1 meter, 39.4")
- Voltage Sense alligator clip lead, Black (1 meter, 39.4")
- LAN/USB Driver CD ROM (with Opt USB or Opt LAN).
- Certificate of Conformance.

## Service and Support

Adaptive Power Systems' customer support is second to none. Our Customer Support Program provides the training, repair, calibration, and technical support services that our customers value. So, in addition to receiving the right test equipment, our customers can also count on excellent support before, during and after the sale. With company owned support and service centers around the world, support is never far away.

**New Product Warranty:** AC Sources & Loads: 1 year, DC Power Supplies: 2 years.

Complete calibration and repair services are offered at our US, European and Chinese manufacturing facilities (see contact info below). Calibrations are to original factory specifications and are traceable to NIST (National Institute of Standards and Technology).

### NORTH AMERICA

Adaptive Power Systems  
Irvine, USA  
Phone: +1(949) 752-8400  
Fax: +1 (949) 756-0838  
Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### EUROPE

Caltest Instruments Ltd.  
Guildford, United Kingdom  
Phone: +44(0)1483 302 700  
Fax: +44(0)1483 300 562  
Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### CHINA

PPST Shanghai Co. Ltd.  
Shanghai, China  
Phone: +86-21-6763-9223  
Fax: +86-21-5763-8240  
Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### NEED HELP?

[sales@adaptivepower.com](mailto:sales@adaptivepower.com)  
OR CALL  
Toll Free: +1 (866) 517-8400  
Intl: +1 (949) 752-8400



Proudly Represented by:



ADAPTIVE POWER SYSTEMS

17711 Mitchell North  
Irvine, CA 92614  
United States  
Toll Free: 1.866.517-8400  
Tel: +1.949.752-8400  
Fax: +1.949.756-0838