

## 5L & 5P SERIES DC LOADS

### Key features:

- 600W, 1200W or 1800W per Chassis (5L Series)
- 14,400W per Cabinet (5P Series)
- Low Voltage Range, 0 - 60 Vdc
- Current Ranges up to 1000 Adc
- High-Speed 5 Digit Precision Metering Capability
- Parallel Operation for High Power Applications
- Synchronized Operation of Multiple Loads
- Operating Modes: CC, CP, CR and CV
- Static and Dynamic CC Modes
- Fast Current Slew Rates
- Built-in Short Circuit Test
- Built-in Power Supply Over Current Protection Test Mode
- Built-in Power Supply Over Power Protection Test Mode
- Go/NoGo Test Support
- Auto-Sequencing
- High Power Load Cabinets
- Available Interface Options are USB, RS232, GPIB and LAN



### OVERVIEW

The ADAPTIVE POWER 5L Series Programmable DC Electronic Loads are ideally suited for testing low voltage, high current power supplies and batteries. With their ability to draw full current starting as low as 0.6 Vdc, the 5L Series loads can provide a wide dynamic range of load conditions.

Target applications for these loads are research & development, production test, incoming inspection, quality control and service.

The high power density of 1800W in a 4U high, single 19" wide rack-mount mainframe represents industry leading power density. The 5L Series consists of a total of six different models, providing a wide variation of possible current and power ranges. Starting at 600 Watt and ranging to 1800 Watt per chassis, all models offer dual voltage and current range capability for optimal accuracy and resolution.

### HIGH POWER 5P SERIES CABINET SYSTEMS

For high current load requirements, the 5P Series of Load Cabinets combines two or more 5L Series rack mount units into an integrated load cabinet system. These systems contain all necessary input wiring and output bus bars to handle DC current up to 1000 Adc. These systems are ideally suited for burn in and battery discharge test applications up to 60 Vdc and as low as 0.6Vdc.

The 5P Series offers high power load performance and durability at an affordable price point.




# 5L & 5P SERIES DC LOADS

## OPERATING MODES

All 5L & 5P Series loads support several modes of operation to accommodate a wide range of test requirements. Voltage sources like AC/DC power supplies are best tested using Constant Current (CC) mode. Battery chargers on the other hand can be tested using an E-load in Constant Voltage (CV) mode.


The available operating modes are Constant Current, Constant Voltage, Constant Power and Constant Resistance. A graphical representation of these modes of operation is shown here.

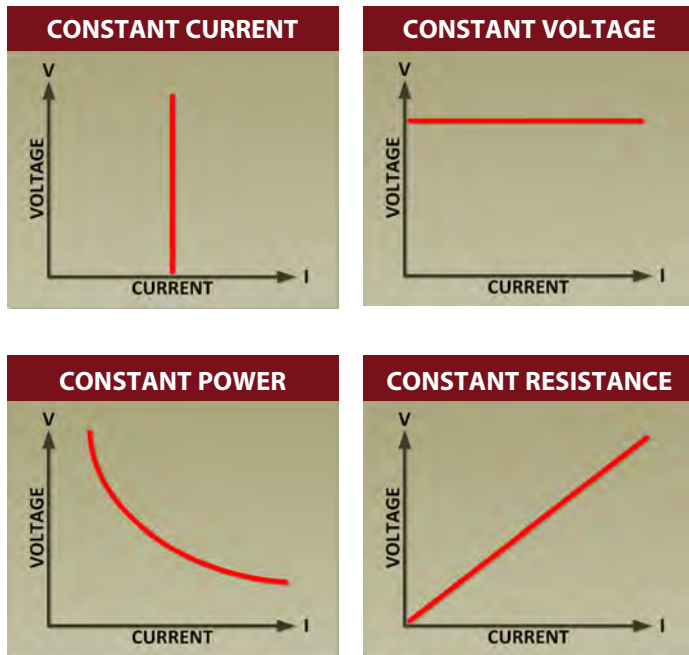

## STATIC & DYNAMIC MODES

The demands put on power supplies to support increasingly complex electronics systems continue to escalate. It is no longer sufficient to test power supplies for static load conditions. Instead, dynamic load conditions requiring rapid changes in current demanded from the power supply need to be evaluated and tested. The 5L & 5P Series Loads serve this purpose by offering high speed programmable dynamic load control.

The diagram below illustrates the variable load current slew rates and dwell times that can be programmed on the 5L & 5P Series loads.

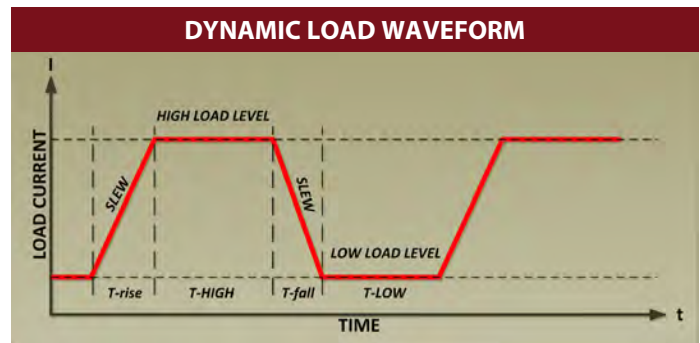


Sequences of variable slew rates and test levels can be stored in non-volatile memory for recall during dynamic transient load test execution. This makes it possible to simulate real-world demanding load conditions on power supplies driving modern electronics. With current slew rates ranging up to several Amps per microsecond and dwell times down to 50 microseconds, thorough transient stability testing of power supply designs is possible. Advanced remote sense and control feedback loops ensure stable and repeatable testing with little or no distortion during load transitions.

## FLEXIBLE INPUT CAPABILITIES

5L Series loads are designed to accommodate a wide range of current input values within their maximum voltage and power capability. This allows the same loads to be used for higher voltage and low current requirements as well as low voltage higher current applications. A typical V-I operating curve is shown on the right for load model 5L18-36. Bounded by the maximum voltage of 60Vdc and maximum current of 360A, the input range follows an 1800W power curve as shown.

Each load continuously tracks its input voltage current and power and safeguards against any operation outside of its operating limits.


This flexible operating range allows the same load to be used for a wide range of EUTs and provides great flexibility.

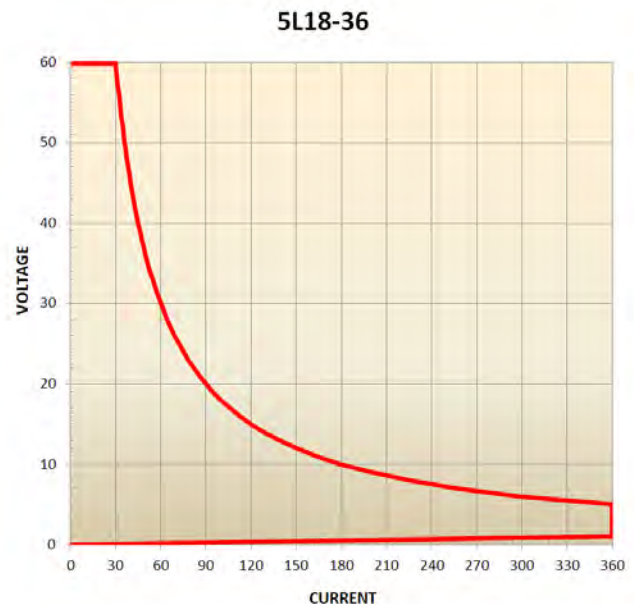




## SHORT CIRCUIT TESTING

Power supplies and batteries must be able to handle short circuit conditions without failing. The 5L & 5P Series loads have a built-in short circuit test mode that allows easy PASS/FAIL detection as part of a test protocol. Programmable parameters short duration time (T-short) and Hi and Lo voltage limits for the EUT during short conditions. If the sensed voltage falls within the user-defined limits, a PASS is recorded.

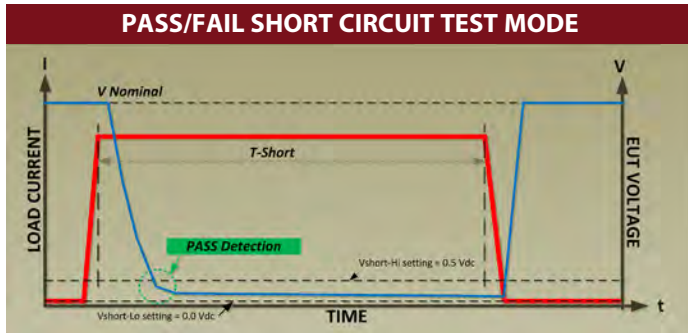

## GO/NOGO LIMIT TESTING

The GO/NG mode of operation is a convenient way to automatically check any measured parameter like voltage, current or power against predefined upper and lower limits. Once set, the load continuously compares readings against these limits and issues a GO or NoGo error output.

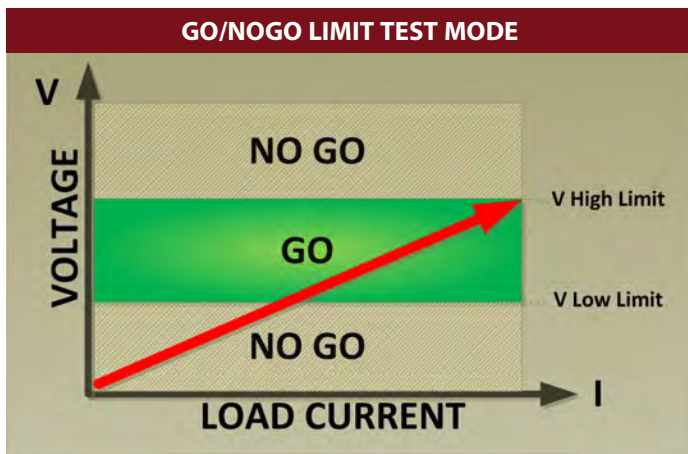

## 5P SERIES CABINET SYSTEMS

For applications where the 5L Series single chassis provides insufficient current and/or power, the 5P Series of Cabinet Systems provides a fully integrated Master/Slave load test system solution.

These systems come in a movable cabinet with pre-installed AC input wiring and solid copper output bus bars that can handle large amounts of DC current.

Cabinets range in size from 2400 Watt to 14400 Watt, with fourteen system configurations to choose from.



DC Load Model 5P054-99 shown




DC Load Model 5P144-96 shown



## OCV MODE TESTING

Testing the Over Current Protection (OCP) function of a power supply is easy when using the APS DC load. A special OCP mode allows setting of start current, end current and step size versus time. A preset voltage threshold level is used to detect protection trip current and terminate the test with either a PASS or FAIL result.

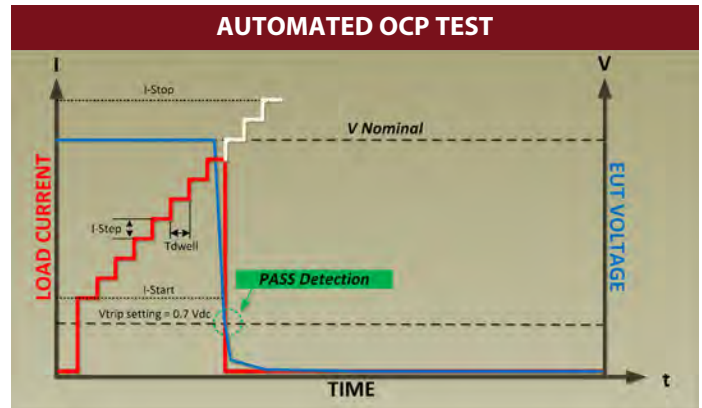


## OPP MODE TESTING

In addition to the OCP Test function, an Over Power Protection (OPP) test is provided as well. Conceptually, the test method is similar to the OCP test but instead of stepping the current, the power drawn by the load is stepped instead until the power supplies goes into protective shutdown or fold-back.


# 5L & 5P SERIES DC LOADS

## FRONT PANEL OPERATION

The 5L Series Load has an easy to use front panel layout consisting of large white LED back-lit LCD readouts and a keypad, shuttle combination for settings and parameter entry. Status indicator LED's accompany the various function and mode setting keys so the operational state of the DC load is easily observed by the operator. The digital rotary encoder makes slewing of parameters very intuitive.

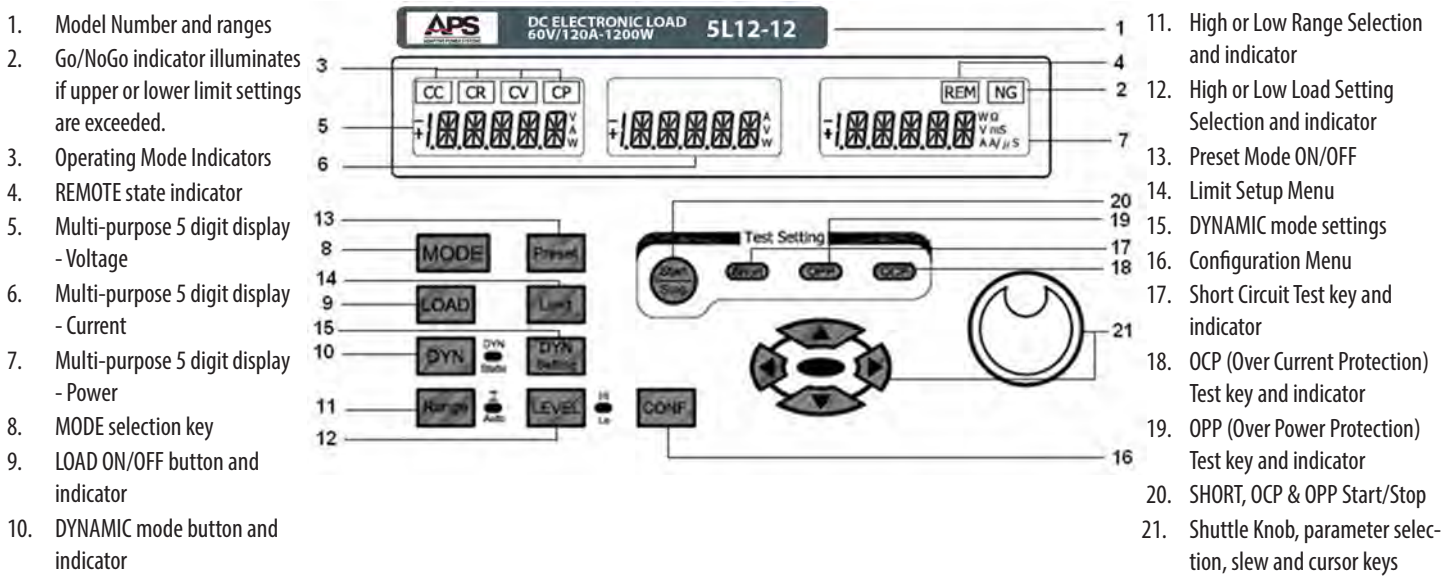

## REAR PANEL

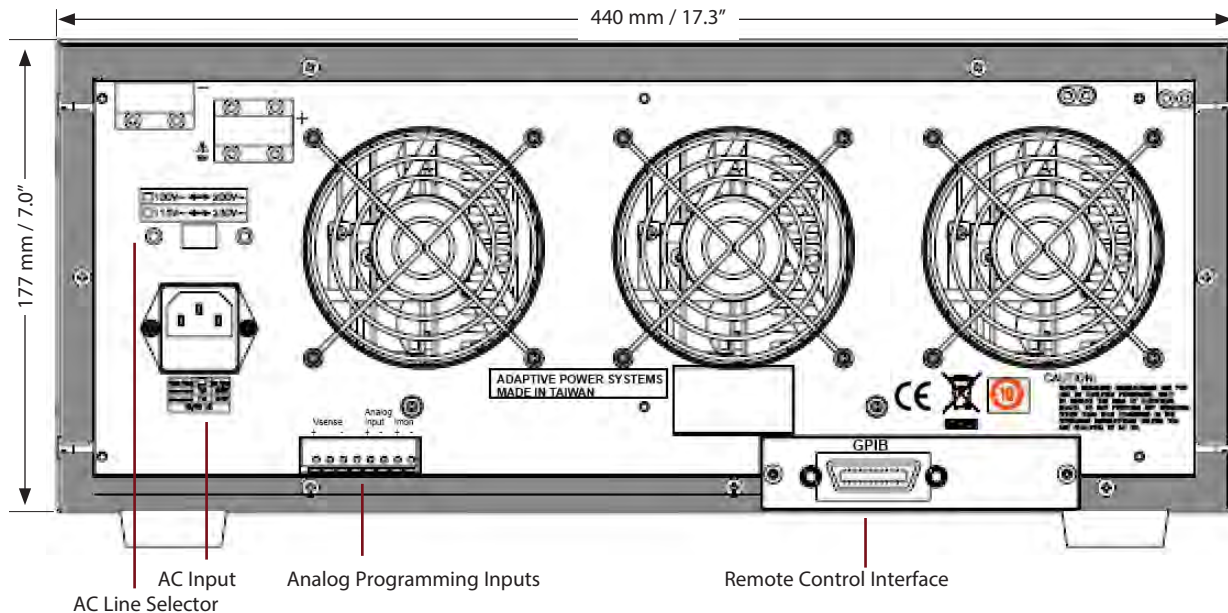

## SPECIFICATIONS - 5L SERIES DC LOADS

| MODEL                                       | 5L06-12   | 5L12-12             | 5L12-24              | 5L18-12             | 5L18-24              | 5L18-36              |
|---|---|---------------------|----------------------|---------------------|----------------------|----------------------|
| <b>OPERATING RANGES</b>                     |   |                     |                      |                     |                      |                      |
| Power Ranges                                | 0-60 W/0-600 W  | 0-120 W/0-1200 W    | 0-120 W/0-1200 W     | 0-180 W/0-1800 W    | 0-180 W/0-1800 W     | 0-180 W/0-1800 W     |
| Current Ranges                              | 0-12A / 0-120 A                                       | 0-12A / 0-120 A     | 0-24 A / 0-240 A     | 0-12 A / 0-120 A    | 0-24 A / 0-240 A     | 0-36 A / 0-360 A     |
| Voltage Range                               | 0 - 60 V  | 0 - 60 V            | 0 - 60 V             | 0 - 60 V            | 0 - 60 V             | 0 - 60 V             |
| Minimum Voltage                             | 0.6 V @ 120 A   | 0.6 V @ 120 A       | 0.7 V @ 240 A        | 0.4 V @ 120 A       | 0.7 V @ 240 A        | 0.7 V @ 360 A        |
| <b>OPERATING MODES</b>                      |   |                     |                      |                     |                      |                      |
| CC Mode Range                               | 0-12 A / 120 A  | 0-12 A / 120 A      | 0-24 A / 240 A       | 0-12 A / 120 A      | 0-24 A / 240 A       | 0-36 A / 360 A       |
| Resolution                                  | 0.2 mA / 2 mA   | 0.2 mA / 2 mA       | 0.4 mA / 4 mA        | 0.2 mA / 2 mA       | 0.4 mA / 4 mA        | 0.6 mA / 6 mA        |
| Accuracy                                    | ± 0.1% OF (SETTING + RANGE)                           |                     |                      |                     |                      |                      |
| CR Mode Range                               | 0.0083 / 0.5 / 30kΩ                                   | 0.0083 / 0.5 / 30kΩ | 0.0041 / 0.25 / 15kΩ | 0.0083 / 0.5 / 30kΩ | 0.0041 / 0.25 / 15kΩ | 0.0027 / 0.167 / 10Ω |
| Resolution                                  | 0.0083mΩ / 0.033mS                                    | 0.0083mΩ / 0.033mS  | 0.0041mΩ / 0.066mS   | 0.0083mΩ / 0.033mS  | 0.0041mΩ / 0.066mS   | 0.0027mΩ / 0.1mS     |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)                           |                     |                      |                     |                      |                      |
| CV Mode Range                               | 0-6.0 V / 0-60.0V                                     | 0-6.0 V / 0-60.0V   | 0-6.0 V / 0-60.0V    | 0-6.0 V / 0-60.0V   | 0-6.0 V / 0-60.0V    | 0-6.0 V / 0-60.0V    |
| Resolution                                  | 0.1 mV / 1 mV   | 0.1 mV / 1 mV       | 0.1 mV / 1 mV        | 0.1 mV / 1 mV       | 0.1 mV / 1 mV        | 0.1 mV / 1 mV        |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)                          |                     |                      |                     |                      |                      |
| CP Mode Range                               | 0-60 W/0 -600 W                                       | 0-120 W/0 -1200 W   | 0-120 W/0 -1200 W    | 0-180 W/0 -1800 W   | 0-180 W/0 -1800 W    | 0-180 W/0 -1800 W    |
| Resolution                                  | 1 mW / 10 mW  | 2 mW / 20 mW        | 2 mW / 20 mW         | 3 mW / 30 mW        | 3 mW / 30 mW         | 3 mW / 30 mW         |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)                           |                     |                      |                     |                      |                      |
| <b>PROTECTION</b>                           |   |                     |                      |                     |                      |                      |
| Over Power (OP)                             | 630 W   | 1260 W              | 1260 W               | 1890 W              | 1890 W               | 1890 W               |
| Over Current (OC)                           | 126.0 A   | 126.0 A             | 252.0 A              | 126.0 A             | 252.0 A              | 378.0 A              |
| Over Voltage (OV)                           | 63.0V   | 63.0V               | 63.0V                | 63.0V               | 63.0V                | 63.0V                |
| Over Temperature (OT)                       | +85° C / +185° F                                      |                     |                      |                     |                      |                      |
| <b>DYNAMIC OPERATION</b>                    |   |                     |                      |                     |                      |                      |
| T high & T low                              | 0.050 - 9.999 / 99.99 / 999.9 / 9999ms (20 kHz)       |                     |                      |                     |                      |                      |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms                              |                     |                      |                     |                      |                      |
| Accuracy                                    | 1µs / 10µs / 100µs / 1ms + 50ppm                      |                     |                      |                     |                      |                      |
| Slew Rate                                   | 8mA-500mA/µs  | 16mA-1A/µs          | 8mA-500mA/µs         | 16mA-1A/µs          | 24mA-1500mA/µs       | 24mA-1500mA/µs       |
|   | 80mA-5A/µs  | 160mA-10A/µs        | 80mA-5A/µs           | 160mA-10A/µs        | 240mA-15A/µs         | 240mA-15A/µs         |
| Accuracy                                    | ± 5% OF SETTING ± 10 µs                               |                     |                      |                     |                      |                      |
| Min. Rise Time                              | 24µs Typical  |                     |                      |                     |                      |                      |
| <b>METERING</b>                             |   |                     |                      |                     |                      |                      |
| Voltage Range                               | 0 - 60.0V / 60.0 V                                    |                     |                      |                     |                      |                      |
| Resolution                                  | 0.1 mV / 1 mV   |                     |                      |                     |                      |                      |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)                         |                     |                      |                     |                      |                      |
| Current Range                               | 0-12 A / 120 A  | 0-12 A / 120 A      | 0-24 A / 240 A       | 0-12 A / 120 A      | 0-24 A / 240 A       | 0-36 A / 360 A       |
| Resolution                                  | 0.2 mA / 2 mA   | 0.2 mA / 2 mA       | 0.4 mA / 4 mA        | 0.2 mA / 2 mA       | 0.4 mA / 4 mA        | 0.6 mA / 6 mA        |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)                           |                     |                      |                     |                      |                      |
| Power Range                                 | 0 - 600.0W  | 0 - 1200.0W         | 0 - 1200.0W          | 0 - 1800.0W         | 0 - 1800.0W          | 0 - 1800.0W          |
| Resolution                                  | 0.1 W   |                     |                      |                     |                      |                      |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)                         |                     |                      |                     |                      |                      |
| <b>SHORT CIRCUIT</b>                        |   |                     |                      |                     |                      |                      |
| Max. Short Current                          | 120 A   | 120 A               | 240 A                | 120 A               | 240 A                | 360 A                |
| <b>ANALOG I/O</b>                           |   |                     |                      |                     |                      |                      |
| Analog Monitor Out                          | 0 - 10V out F.S. / 1KΩ Zout, Non-isolated             |                     |                      |                     |                      |                      |
| Analog Input (CC mode)                      | 0 - 10V in for F.S. current @ 10V                     |                     |                      |                     |                      |                      |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |                     |                      |                     |                      |                      |
| Power & Cooling                             | 115/230Vac ± 10%, 50/60 Hz, Variable Speed Fan Cooled |                     |                      |                     |                      |                      |
| Dimensions (H x W x D)                      | 177 x 440 x 445 mm / 7.0" x 17.3" x 17.5"             |                     |                      |                     |                      |                      |
| Weight (Net)                                | 15.2kg / 33.5lbs                                      | 19.4kg / 42.8lbs    | 19.4kg / 42.8lbs     | 23.6kg / 52.0lbs    | 23.6kg / 52.0lbs     | 23.6kg / 52.0lbs     |
| Operating Range                             | 0 - 40° C / 32 - 104° F                               |                     |                      |                     |                      |                      |
| EMC & Safety                                | CE Mark   |                     |                      |                     |                      |                      |

# 5L & 5P SERIES MODULAR DC LOADS

## SPECIFICATIONS - 5P SERIES DC LOADS

| MODEL                                       | 5P024-24  | 5P024-48              | 5P036-24             | 5P036-48              | 5P036-72               | 5P054-36              | 5P054-72               |
|---|---|-----------------------|----------------------|-----------------------|------------------------|-----------------------|------------------------|
| <b>OPERATING RANGES</b>                     |   |                       |                      |                       |                        |                       |                        |
| Power Ranges                                | 0-240W/0-2400W  | 0-240W/0-2400W        | 0-360W/0-3600W       | 0-360W/0-3600W        | 0-360W/0-3600W         | 0-540W/0-5400W        | 0-540W/0-5400W         |
| Current Ranges                              | 0-24A/0-240A  | 0-48A/0-480A          | 0-24A/0-240A         | 0-48A/0-480A          | 0-72A/0-720A           | 0-36A/0-360A          | 0-72A/0-720A           |
| Voltage Range                               | 0-60V   | 0-60V                 | 0-60V                | 0-60V                 | 0-60V                  | 0-60V                 | 0-60V                  |
| Minimum Voltage                             | 0.7V @ 240A   | 0.7V @ 480A           | 0.7V @ 240A          | 0.7V @ 480A           | 0.7V @ 720A            | 0.7V @ 360A           | 0.7V @ 720A            |
| <b>OPERATING MODES</b>                      |   |                       |                      |                       |                        |                       |                        |
| CC Mode Range                               | 0-24A / 240A  | 0-48A / 480A          | 0-24A / 240A         | 0-48A / 480A          | 0-72A / 720A           | 0-36A / 360A          | 0-72A / 720A           |
| Resolution                                  | 0.4mA / 4mA   | 0.8mA / 8mA           | 0.4mA / 4mA          | 0.8mA / 8mA           | 1.2mA / 12mA           | 0.6mA / 6mA           | 1.2mA / 12mA           |
| Accuracy                                    | ± 0.1% OF (SETTING + RANGE)                           |                       |                      |                       |                        |                       |                        |
| CR Mode Range                               | 0.0041 / 0.25 / 15kΩ                                  | 0.002 / 0.125 / 7.5kΩ | 0.0041 / 0.25 / 15kΩ | 0.002 / 0.125 / 7.5kΩ | 0.00138 / 0.0833 / 5kΩ | 0.0027 / 0.167 / 10kΩ | 0.00138 / 0.0833 / 5kΩ |
| Resolution                                  | 0.0041mΩ / 0.066mS                                    | 0.002mΩ / 0.1333mS    | 0.0041mΩ / 0.066mS   | 0.002mΩ / 0.133mS     | 0.00138mΩ / 0.2mS      | 0.0028mΩ / 0.1mS      | 0.0028mΩ / 0.1mS       |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)                           |                       |                      |                       |                        |                       |                        |
| CV Mode Range                               | 0-6.0V / 0-60.0V                                      | 0-6.0V / 0-60.0V      | 0-6.0V / 0-60.0V     | 0-6.0V / 0-60.0V      | 0-6.0V / 0-60.0V       | 0-6.0V / 0-60.0V      | 0-6.0V / 0-60.0V       |
| Resolution                                  | 0.1mV / 1mV   | 0.1mV / 1mV           | 0.1mV / 1mV          | 0.1mV / 1mV           | 0.1mV / 1mV            | 0.1mV / 1mV           | 0.1mV / 1mV            |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)                          |                       |                      |                       |                        |                       |                        |
| CP Mode Range                               | 0-240W/0-2400W  | 0-240W/0-2400W        | 0-360W/0-3600W       | 0-360W/0-3600W        | 0-360W/0-3600W         | 0-540W/0-5400W        | 0-540W/0-5400W         |
| Resolution                                  | 3mW / 30mW  | 4mW / 40mW            | 6mW / 60mW           | 6mW / 60mW            | 6mW / 60mW             | 9mW / 90mW            | 9mW / 90mW             |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)                           |                       |                      |                       |                        |                       |                        |
| <b>PROTECTION</b>                           |   |                       |                      |                       |                        |                       |                        |
| Over Power (OP)                             | 2520W   | 2520W                 | 3780W                | 3780W                 | 3780W                  | 5670W                 | 5670W                  |
| Over Current (OC)                           | 252.0A  | 504.0A                | 252.0A               | 504.0A                | 756.0A                 | 378.0A                | 756.0W                 |
| Over Voltage (OV)                           | 63.0V   | 63.0V                 | 63.0V                | 63.0V                 | 63.0V                  | 63.0V                 | 63.0V                  |
| Over Temperature (OT)                       | +85°C / +185°F  |                       |                      |                       |                        |                       |                        |
| <b>DYNAMIC OPERATION</b>                    |   |                       |                      |                       |                        |                       |                        |
| T high & T low                              | 0.050 - 9.999 / 99.99 / 999.9 / 9999ms (20 kHz)       |                       |                      |                       |                        |                       |                        |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms                              |                       |                      |                       |                        |                       |                        |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm                      |                       |                      |                       |                        |                       |                        |
| Slew Rate                                   | 0.016A-1A/μs  | 0.032A-2A/μs          | 0.016A-1A/μs         | 0.016A-1A/μs          | 0.048A-3A/μs           | 0.024A-1.5A/μs        | 0.048A-3A/μs           |
|   | 0.16A-10A/μs  | 0.32A-20A/μs          | 0.16A-10A/μs         | 0.16A-10A/μs          | 0.48A-30A/μs           | 0.24A-15A/μs          | 0.48A-30A/μs           |
| Accuracy                                    | ± 5% OF SETTING ± 10μs                                |                       |                      |                       |                        |                       |                        |
| Min. Rise Time                              | 24μs Typical  |                       |                      |                       |                        |                       |                        |
| <b>METERING</b>                             |   |                       |                      |                       |                        |                       |                        |
| Voltage Range                               | 0-6.0V / 60.0V  |                       |                      |                       |                        |                       |                        |
| Resolution                                  | 0.1mV / 1mV   |                       |                      |                       |                        |                       |                        |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)                         |                       |                      |                       |                        |                       |                        |
| Current Range                               | 0-24A / 240A  | 0-48A / 480A          | 0-24A / 240A         | 0-48A / 480A          | 0-72A / 720A           | 0-36A / 360A          | 0-72A / 720A           |
| Resolution                                  | 0.4mA / 4mA   | 0.8mA / 8mA           | 0.4mA / 4mA          | 0.8mA / 8mA           | 1.2mA / 12mA           | 0.6mA / 6mA           | 1.2mA / 12mA           |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)                           |                       |                      |                       |                        |                       |                        |
| Power Range                                 | 0-2400.0W   | 0-2400.0W             | 0-2400.0W            | 0-3600.0W             | 0-3600.0W              | 0-5400.0W             | 0-5400.0W              |
| Resolution                                  | 0.1W  |                       |                      |                       |                        |                       |                        |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)                         |                       |                      |                       |                        |                       |                        |
| <b>SHORT CIRCUIT</b>                        |   |                       |                      |                       |                        |                       |                        |
| Max. Short Current                          | 240A  | 480A                  | 240A                 | 480A                  | 720A                   | 360A                  | 720A                   |
| <b>ANALOG I/O</b>                           |   |                       |                      |                       |                        |                       |                        |
| Analog Monitor Out                          | 0-10V out F.S. / 1KΩ Zout, Non-isolated               |                       |                      |                       |                        |                       |                        |
| Analog Input (CC mode)                      | 0-10V in for F.S. current @ 10V                       |                       |                      |                       |                        |                       |                        |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |                       |                      |                       |                        |                       |                        |
| Power & Cooling                             | 115/230Vac ± 10%, 50/60 Hz, Variable Speed Fan Cooled |                       |                      |                       |                        |                       |                        |
| Dimensions (H x W x D)                      | 839 x 600 x 600 mm / 33.0" x 23.6" x 23.6"            |                       |                      |                       |                        |                       |                        |
| Weight (Net)                                | 81.2kg / 179.0lb                                      | 81.2kg / 179.0lb      | 81.2kg / 179.0lbs    | 81.2kg / 179.0lbs     | 81.2kg / 179.0lbs      | 104.8kg / 231lbs      | 104.8kg / 231lbs       |
| Operating Range                             | 0-40°C / 32-104°F                                     |                       |                      |                       |                        |                       |                        |
| EMC & Safety                                | CE Mark   |                       |                      |                       |                        |                       |                        |



## SPECIFICATIONS - 5P SERIES DC LOADS

| MODEL                                       | 5P054-99  | 5P072-48                                     | 5P072-96                                     | 5P090-60                                     | 5P108-72                                   | 5P126-84                       | 5P144-96                     |
|---|---|--|--|--|--|--------------------------------|------------------------------|
| <b>OPERATING RANGES</b>                     |   |  |  |  |  |                                |                              |
| Power Ranges                                | 0-540W/0-5400W  | 0-720W/0-7200W                               | 0-720W/0-7200W                               | 0-900W/0-9000W                               | 0-1080W/0-10800W                           | 0-1260W/0-12600W               | 0-1440W/0-14400W             |
| Current Ranges                              | 0-100 A /0-1000 A                                     | 0-48 A /0-480 A                              | 0-96 A /0-960 A                              | 0-60 A /0-600 A                              | 0-72 A /0-720 A                            | 0-84 A /0-840 A                | 0-96 A /0-960 A              |
| Voltage Range                               | 0 - 60 V  | 0 - 60 V                                     | 0 - 60 V                                     | 0 - 60 V                                     | 0 - 60 V                                   | 0 - 60 V                       | 0 - 60 V                     |
| Minimum Voltage                             | 0.7 V @ 1000 A  | 0.7 V @ 480 A                                | 0.7 V @ 960 A                                | 0.7 V @ 600 A                                | 0.7 V @ 720 A                              | 0.7 V @ 840 A                  | 0.7 V @ 960 A                |
| <b>OPERATING MODES</b>                      |   |  |  |  |  |                                |                              |
| CC Mode Range                               | 0-100 A /0-1000 A                                     | 0-48 A /0-480 A                              | 0-96 A /0-960 A                              | 0-60 A /0-600 A                              | 0-72 A /0-720 A                            | 0-84 A /0-840 A                | 0-96 A /0-960 A              |
| Resolution                                  | 1.6 mA / 16 mA  | 0.8 mA / 8 mA                                | 1.6 mA / 16 mA                               | 1 mA / 10 mA                                 | 1.2 mA / 12 mA                             | 1.4 mA / 14 mA                 | 1.6 mA / 16 mA               |
| Accuracy                                    | ± 0.1% OF (SETTING + RANGE)                           |  |  |  |  |                                |                              |
| CR Mode Range                               | 0.001 / 0.06 / 3.6kΩ                                  | 0.002 / 0.125 / 7.5kΩ                        | 0.001 / 0.0625 / 3750Ω                       | 0.0017 / 0.1 / 6kΩ                           | 0.00138 / 0.083 / 5kΩ                      | 0.0012 / 0.0714 / 4284Ω        | 0.001 / 0.0625 / 3750Ω       |
| Resolution                                  | 0.001mΩ / 0.277mS                                     | 0.002mΩ / 0.13mS                             | 0.001mΩ / 0.267mS                            | 0.0016mΩ / 0.016mS                           | 0.0014mΩ / 0.2mS                           | 0.0003mΩ / 0.23mS              | 0.001mΩ / 0.267mS            |
| Accuracy                                    | ± 0.2% OF (SETTING + RANGE)                           |  |  |  |  |                                |                              |
| CV Mode Range                               | 0-6.0 V / 0-60.0V                                     | 0-6.0 V / 0-60.0V                            | 0-6.0 V / 0-60.0V                            | 0-6.0 V / 0-60.0V                            | 0-6.0 V / 0-60.0V                          | 0-6.0 V / 0-60.0V              | 0-6.0 V / 0-60.0V            |
| Resolution                                  | 0.1 mV / 1 mV   | 0.1 mV / 1 mV                                | 0.1 mV / 1 mV                                | 0.1 mV / 1 mV                                | 0.1 mV / 1 mV                              | 0.1 mV / 1 mV                  | 0.1 mV / 1 mV                |
| Accuracy                                    | ± 0.05% OF (SETTING + RANGE)                          |  |  |  |  |                                |                              |
| CP Mode Range                               | 0-540W/0-5400W  | 0-720W/0-7200W                               | 0-720W/0-7200W                               | 0-900W/0-9000W                               | 0-1080W/0-10800W                           | 0-1260W/0-12600W               | 0-1440W/0-14400W             |
| Resolution                                  | 9 mW / 90 mW  | 12 mW / 120 mW                               | 12 mW / 120 mW                               | 15 mW / 150 mW                               | 18 mW / 180 mW                             | 21 mW / 210 mW                 | 24 mW / 240 mW               |
| Accuracy                                    | ± 0.5% OF (SETTING + RANGE)                           |  |  |  |  |                                |                              |
| <b>PROTECTION</b>                           |   |  |  |  |  |                                |                              |
| Over Power (OP)                             | 5670 W  | 7560 W                                       | 7560 W                                       | 9450 W                                       | 11340 W                                    | 13320 w                        | 15120 W                      |
| Over Current (OC)                           | 1050 A  | 504.0 A                                      | 1008 A                                       | 630.0 A                                      | 756.0 A                                    | 882.0 A                        | 1008 A                       |
| Over Voltage (OV)                           | 63.0V   | 63.0V  | 63.0V  | 63.0 V                                       | 63.0 V                                     | 63.0V                          | 63.0 V                       |
| Over Temperature (OT)                       | +85° C / +185° F                                      |  |  |  |  |                                |                              |
| <b>DYNAMIC OPERATION</b>                    |   |  |  |  |  |                                |                              |
| T high & T low                              | 0.050 - 9.999 / 99.99 / 999.9 / 9999ms (20 kHz)       |  |  |  |  |                                |                              |
| Resolution                                  | 0.001 / 0.01 / 0.1 / 1ms                              |  |  |  |  |                                |                              |
| Accuracy                                    | 1μs / 10μs / 100μs / 1ms + 50ppm                      |  |  |  |  |                                |                              |
| Slew Rate                                   | 0.0664A-4.15A/μs<br>0.644A-41.5A/μs                   | 0.032A-2A/μs<br>0.32A-20A/μs                 | 0.064A-4A/μs<br>0.64A-40A/μs                 | 0.04A-2.5A/μs<br>0.4A-25A/μs                 | 0.048A-3A/μs<br>0.48A-30A/μs               | 0.056A-3.5A/μs<br>0.56A-35A/μs | 0.064A-4A/μs<br>0.64A-40A/μs |
| Accuracy                                    | ± 5% OF SETTING ± 10 μs                               |  |  |  |  |                                |                              |
| Min. Rise Time                              | 24μs Typical  |  |  |  |  |                                |                              |
| <b>METERING</b>                             |   |  |  |  |  |                                |                              |
| Voltage Range                               | 0 - 6.0 V / 60.0 V                                    |  |  |  |  |                                |                              |
| Resolution                                  | 0.1 mV / 1 mV   |  |  |  |  |                                |                              |
| Accuracy                                    | ± 0.025% OF (READING + RANGE)                         |  |  |  |  |                                |                              |
| Current Range                               | 0-100 A /0-1000 A                                     | 0-48 A /0-480 A                              | 0-96 A /0-960 A                              | 0-60 A /0-600 A                              | 0-72 A /0-720 A                            | 0-84 A /0-840 A                | 0-96 A /0-960 A              |
| Resolution                                  | 1.6 mA / 16 mA  | 0.8 mA / 8 mA                                | 1.6 mA / 16 mA                               | 1 mA / 10 mA                                 | 1.2 mA / 12 mA                             | 1.4 mA / 14 mA                 | 1.6 mA / 16 mA               |
| Accuracy                                    | ± 0.1% OF (READING + RANGE)                           |  |  |  |  |                                |                              |
| Power Range                                 | 0 - 5400.0 W  | 0 - 7200.0 W                                 | 0 - 7200.0 W                                 | 0 - 9000.0 W                                 | 0 - 10800.0 W                              | 0 - 12600.0 W                  | 0 - 14400.0 W                |
| Resolution                                  | 0.1 W   |  |  |  |  |                                |                              |
| Accuracy                                    | ± 0.125% OF (READING + RANGE)                         |  |  |  |  |                                |                              |
| <b>SHORT CIRCUIT</b>                        |   |  |  |  |  |                                |                              |
| Max. Short Current                          | 1000 A  | 480 A  | 960 A  | 600 A  | 720 A                                      | 840 A                          | 960 A                        |
| <b>ANALOG I/O</b>                           |   |  |  |  |  |                                |                              |
| Analog Monitor Out                          | 0 - 10 V out F.S. / 1KΩ Zout, Non-isolated            |  |  |  |  |                                |                              |
| Analog Input (CC mode)                      | 0 - 10V in for F.S. current @ 10V                     |  |  |  |  |                                |                              |
| <b>AC INPUT AND PHYSICAL SPECIFICATIONS</b> |   |  |  |  |  |                                |                              |
| Power & Cooling                             | 115/230Vac ± 10%, 50/60 Hz, Variable Speed Fan Cooled |  |  |  |  |                                |                              |
| Dimensions (H x W x D)                      | 839x600x600mm<br>33" x 23.6" x 23.6"                  | 1601 x 600 x 600 mm<br>41.8" x 23.6" x 23.6" | 1283 x 600 x 600 mm<br>50.5" x 23.6" x 23.6" | 1506 x 600 x 600 mm<br>59.3" x 23.6" x 23.6" | 1728 x 600 x 600 mm<br>68" x 23.6" x 23.6" |                                |                              |
| Weight (Net)                                | 104.8kg/231.0 lbs                                     | 161.4kg/355.8lbs                             | 161.4kg/355.8 lbs                            | 185.0kg/407.9 lbs                            | 208.6kg/459.9 lbs                          | 232.2kg/511.9 lbs              | 268.8kg / 592.6 lbs          |
| Operating Range                             | 0 - 40° C / 32 - 104° F                               |  |  |  |  |                                |                              |
| EMC & Safety                                | CE Mark   |  |  |  |  |                                |                              |

# 5L & 5P SERIES DC LOADS

## ORDERING INFORMATION:

**Line 1:** Specify DC Load Model:

5Lxx-xx Chassis

or

5Pxxx-xx Cabinet System

**Line 2:** Specify Remote Control Option:

None, Opt GPIB, Opt RS232, Opt USB or Opt LAN

**Line 3:** Specify Load Cable Option. (See Table)

### Available Load Cable Options:

| Option P/N | Description                      | MOQ |
|------------|----------------------------------|-----|
| OPT-C1KA1  | Load Cable, 1000A rated, 1 meter | 2   |
| OPT-C1KA2  | Load Cable, 1000A rated, 2 meter | 2   |
| OPT-C1KA3  | Load Cable, 1000A rated, 3 meter | 2   |
| OPT-C1KA4  | Load Cable, 1000A rated, 4 meter | 2   |
| OPT-C1KA5  | Load Cable, 1000A rated, 5 meter | 2   |

## AC Input Voltage

Please specify AC Line input voltage at the ship-to location on the order as either 120Vac or 230Vac.

### Included in Mainframe Ship kit:

- User Manuals in PDF Format on CD ROM.
- AC Line Cord.
- Rack Handles (detached).
- Analog Input BNC Cable (1 meter/39.4").
- Voltage Sense alligator clip lead, Red (1 meter, 39.4")
- Voltage Sense alligator clip lead, Black (1 meter, 39.4")
- LAN/USB Driver CD ROM (with Opt USB or Opt LAN).
- Certificate of Conformance.

## Service and Support

Adaptive Power Systems' customer support is second to none. Our Customer Support Program provides the training, repair, calibration, and technical support services that our customers value. So, in addition to receiving the right test equipment, our customers can also count on excellent support before, during and after the sale. With company owned support and service centers around the world, support is never far away.

Complete calibration and repair services are offered at our US, European and Chinese manufacturing facilities (see contact info below). Calibrations are to original factory specifications and are traceable to NIST (National Institute of Standards and Technology).

### NORTH AMERICA

Adaptive Power Systems  
Irvine, USA

Phone: +1 (949) 752-8400

Fax: +1 (949) 756-0838

Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### EUROPE

Caltest Instruments Ltd.  
Guildford, United Kingdom

Phone: +44(0)1483 302 700

Fax: +44(0)1483 300 562

Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### CHINA




PPST Shanghai Co. Ltd.  
Shanghai, China

Phone: +86-21-6763-9223

Fax: +86-21-5763-8240

Email: [support@adaptivepower.com](mailto:support@adaptivepower.com)

### NEED HELP?

 [sales@adaptivepower.com](mailto:sales@adaptivepower.com)  
 OR CALL  
 Toll Free: +1 (866) 517-8400  
 Intl: +1 (949) 752-8400



Proudly Represented by:



**ADAPTIVE POWER SYSTEMS**

17711 Mitchell North

Irvine, CA 92614

United States

Toll Free: 1.866.517-8400

Tel: +1.949.752-8400

Fax: +1.949.756-0838